


SELF-REGULATING CABLE 20W/m

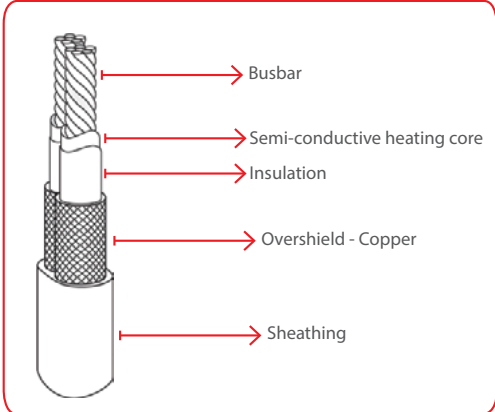

The Warmup self-regulating heating cable allows the melting of snow and ice on roofs and in gutters, by responding to the ambient temperature.

Technical Specifications

Voltage	220 - 240V, 50Hz
Power rating	20W/m at 10°C
Cold tail length	2m (with terminated cable)
Cable diameter	10.6 x 5.9 mm
Internal insulation	Thermoplastic elastomer
Resistance tolerance	-5% / +5%
Min/max temperature	-30°C to 85°C
Minimum bending radius	25mm
UV resistant	yes
Certifications	FIMKO, CE


Key features:

- UV resistant
- 100% waterproof
- Easy to install, with a power outlet
- Economy, heats only when necessary
- Self-regulating

Dimensions self-regulating cable

Product code	Length (m)	Wattage (W)	Amperage (A)	Resistance (Ω)
W20SR500	25	500	2,2	105,8
W20SR600	30	600	2,6	88,2
W20SR1000	50	1000	4,4	52,9
W20SR1600	80	1600	7,0	33,1
W20SR/m	Cut to length. Sold per meter, minimum order 20m			

Note: the cable is available in reels of 500m, and can be cut at lengths from 20m to 500m at 1m intervals

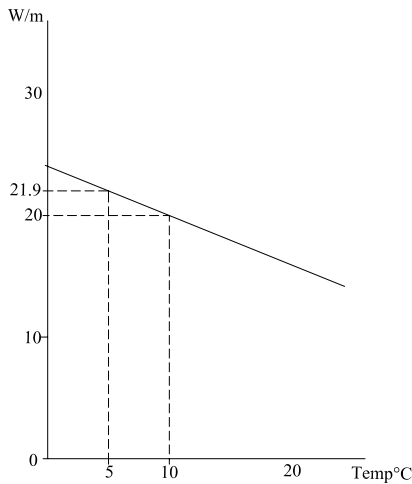

Accessories

